



ST-260

ST-260M

Night vision



Series Model

- ST-260: 125KHz Em Marin format
- ST-260M: 13.56MHz Mifare format
- ST-260MH: 13.56MHz Mifare SOCA V.2 format

Special features


- Glowing bar and buzzer indicator.
- 8 sets of door opening password available for user to set.
- 2,000 cards capacity (2,000 random numbers).
- Stainless steel case.

- Anti-duress function and anti-tamper signal output.
- Stainless steel case with multiple waterproof design (Ip62) which is able to mount outdoors or indoors.
- Stainless steel translucent buttons and 5 door opening modes.


Specification

- | | |
|--|---|
| <ul style="list-style-type: none"> • Power Supply : DC 12V \pm15% • Frequency : 125KHz or 13.56MHz . • Door closing time: 00-99 seconds. • Card capacity: 2000 • SUS304 Stainless steel case. • Operation mode: standalone • Dimensions: 115L \times 70W \times 30.5H (mm). • Weight: 315g (included wrapping). | <ul style="list-style-type: none"> • Power consumption: 100mA (standby); 125mA (operation)\pm5% • Five door opening methods: <ol style="list-style-type: none"> 1. Password 2. Proximity card 3. Proximity card and password 4. Password or proximity card 5. Special system password • Door opening password: 8 sets of 4-digit door opening password • Input point: 1.Exit push button 2. Anti-theft detection
3.Door sensing input 4.LED control(Orange) • Output point: 1. Door open connector 2.Alarm output
3.Anti-tamper alarm output 4.Anti-Duress alarm output • Keyboard: 3\times4, 12 stainless steel translucent buttons. |
|--|---|

Panel

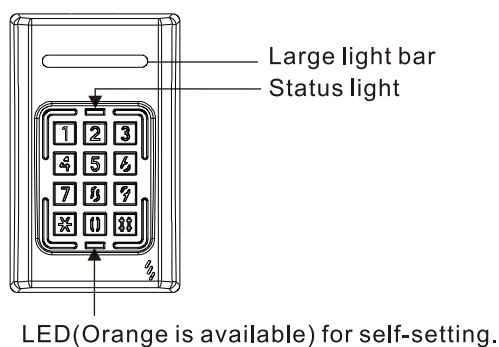

Waterproof

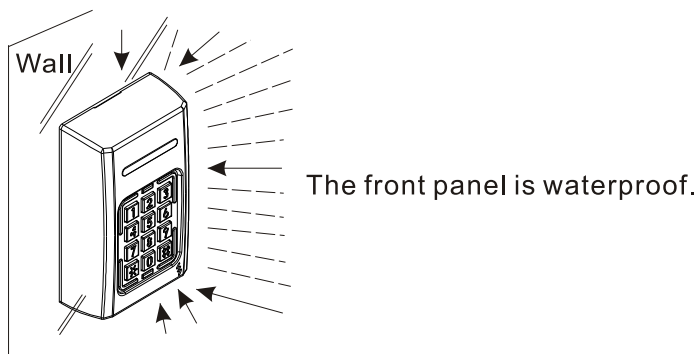

Structure diagram

