



- Strong and durable SUS304 stainless steel button and panel design .
- Suitable for hollow door frame and electrical box use.
- For sole use or with different panels.
- Custom-made micro-switch according to user's requirements (such as waterproof or currents).

## Specification


Item	SW-10AL	SW-10A
Indicator light	Available	Not Available
Power input	12VDC±20%(LED)	Not Available
Output	N.O. & N.C.	
Material	#304 Stainless steel	
Alternate action	Stepless	
Contract rating	5A@250VAC	
Mechanical Life	1,000,000 cycles	
Contact Life	100,000 cycles ( Full load )	
Water-Proof	IP54	
Operating temperature	0~75°C	

## Model Number List


Type	Single switch	Package		
SW-10A Without LED	SW-10A	SW-20A	SW-60A	SW-80A
SW-10AL With LED	SW-10AB (Blue Light)	SW-20AB	SW-60AB	SW-80AB
	SW-10AR (Red Light)	SW-20AR	SW-60AR	SW-80AR
	SW-10AG (Green Light)	SW-20AG	SW-60AG	SW-80AG

## Dimensions

### 【Single Switch】

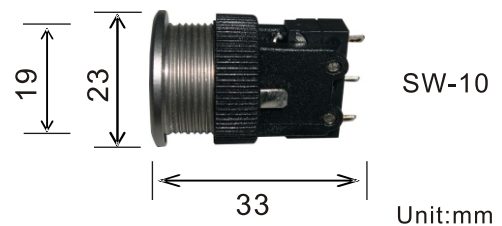


### 【Panel】

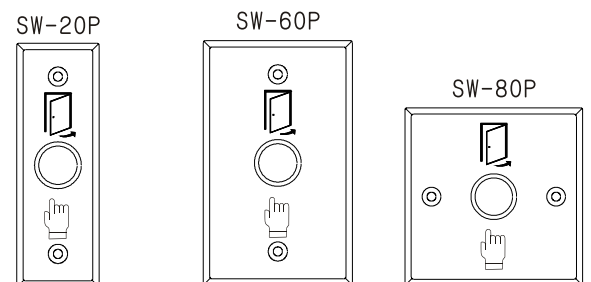

115×39×26 (mm)    115×70×26 (mm)    86×86×26 (mm)

## Waterproof

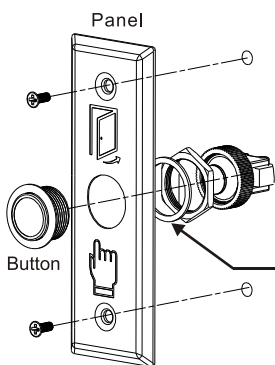

### 【Installation of O-ring】

\* Install O-ring behind the panel to connect both push button and the panel .

\* To achieve waterproof function, install the O-ring between the push button and the panel in order to seal without any seam gap.  
(The facade of the push button is waterproof.)