





## Special features

- Complete waterproof unit and suitable for outdoor installation.
- Anti-duress password function.
- Long slim feature and fit for 43mm door frame.
- External yellow light available for user to set.
- Provides 2 sets of external RELAY for door opening and siren.
- Automatically temporarily unavailable when 3 password errors occurred.
- User password is available to set as 3~12-digit manner. 80 sets of password are available to divide into different sets for user to use and manage.

## Specification



- Power Supply : DC 12V  $\pm$  15%
- Password length: 3~12-digit manner
- Opening methods:
  1. Password
  2. Special system password
- Set of password : 80 sets
- Operation mode : Standalone
- Keyboard: 2 $\times$ 6, 12 buttons
- Dimensions: 135L  $\times$  43W  $\times$  25H (mm).
- Weight :200g(included wrapping).
- Power consumption: 130mA (standby); 150mA (operation) $\pm$  5%
- Fireproof polycarbonate material for outer casing .
- Protection measure: Automatically temporarily unavailable for 20 seconds.
- Door closing time: 00-99 seconds  
Setting 99 seconds as toggle state (suitable for security system) .
- Input point:
  1. Exit push button
  2. Anti-theft detection
  3. Door sensing input
- Output point: 1. Door Open 2. Alarm output

## Waterproof

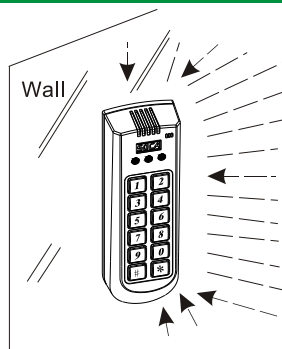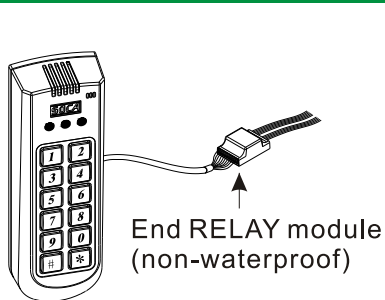

Complete waterproof unit

## Structure diagram

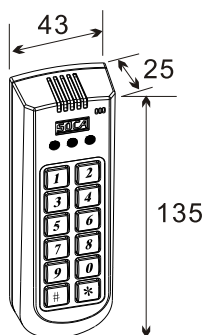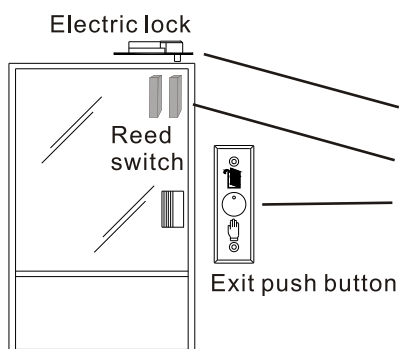

Unit: mm



Siren