



Series Model

- ST-660S: 125KHz Em Marin format
- ST-660SM: 13.56MHz Mifare format
- ST-660SMF: 13.56MHz Mifare SOCA format
- ST-660SMH: 13.56MHz Mifare SOCA V.2 format

Special features


- 8 sets of door opening password available for user to set.
- Five door opening methods.
- 2,000 cards capacity (2,000 random numbers).
- Stainless steel durable buttons.

- Backlight LCD and buzzer indicators.
- Anti-duress installation and anti-tamper signal output.
- Both door-opening and anti-theft unit for setting functions simultaneously.

Specification


- Power Supply : DC 12V \pm 15%
- Display: 16 \times 2 STN LCD backlight display
- Frequency: 125KHz or 13.56MHz .
- Door closing time: 0-255 seconds.
- Card capacity: 2000 (ST-660 is 10,000 cards.)
- Operation mode: standalone
- Keyboard: 2 \times 6, 12 stainless steel buttons.
- Dimensions: 160L \times 100W \times 30H (mm).
- Weight: 425g (included wrapping).
- Power consumption: 150mA (standby); 180mA (operation) \pm 5%
- Fireproof polycarbonate material for outer casing .
- Five door opening methods:
 1. Password
 2. Proximity card
 3. Proximity card and password
 4. Password or proximity card
 5. Special system password
- Door opening password: 8 sets of 4-digit door opening password
- Input point: 1.Exit push button 2. Anti-theft detection
3.Door sensing input
- Output point: 1. Door open connector 2.Alarm output
3.Anti-tamper alarm output 4.Anti-Duress alarm output

Dimensions



Unit: mm

Panel

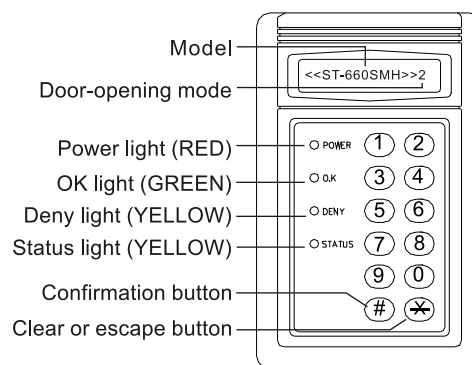

Structure diagram

