



Series Model

- ST-660E:125KHz Em Marin format
- ST-660ME:13.56MHz Mifare format
- ST-660MEF:13.56MHz Mifare SOCA format
- ST-660MEH:13.56MHz Mifare SOCA V.2 format

Special features

- Multiple floors for every card.
- All access function of the reader for administration use.

- Standalone to operate card and distribution of floor authority.
- SE-18 can be simultaneously connected with maximum of 3 elevator controllers for any buildings above 18 floors.
- Maximum of serial connection of 3 SE-18 for up to 54 floors control.
- All access function for SE-18 for maintenance or when the front reader is out of order.



ST-660E Specification

- Power Supply : DC 12V $\pm 15\%$
- Frequency : 125KHz or 13.56MHz .
- Door closing time: 00-99 seconds.
- Operation mode: standalone
- Keyboard: 2x6, 12 stainless steel buttons.
- Dimensions: 160L $\times$ 100W $\times$ 30H (mm).
- Weight: 425g (included wrapping).
- Power consumption: 150mA (standby); 180mA (operation) $\pm 5\%$
- Display:16 $\times$ 2 STN ultra wide backlight LCD display
- Fireproof polycarbonate material for outer casing .
- Door opening methods: 1. Proximity 2. Special system password
- Card capacity: Maximum of 2,000 points(piece).
One point for every floor registered.
- Input point: 1.Exit push button 2. Anti-theft detection
- Output point:1. Door open connector 2.Alarm output
3.Anti-tamper alarm output

SE-18 Specification

- Power Supply : DC 12V $\pm 15\%$
- Power consumption: 250mA $\pm 5\%$
- Output Contract rating: 3A@DC12V
- Dimensions: 210L $\times$ 145W $\times$ 50H (mm).
- Weight: 800g (included wrapping).

Dimensions

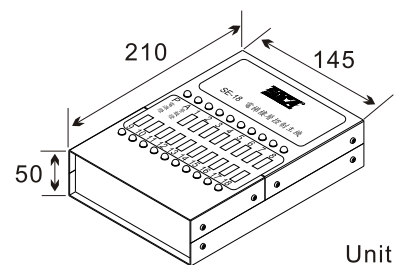

Unit: mm

Structure diagram

