



## Series Model

- ST-120EA: 125KHz Em Marin format
- ST-120MA: 13.56MHz Mifare format
- ST-120MAF: 13.56MHz Mifare SOCA format

## Special features


- Waterproof design. No exposed screws.
- 8 sets of door opening password available for user to set.
- 1,000 cards capacity.
- Five door opening methods.

- Stainless steel keypad with indicator light at night.
- Provides 2 sets of external RELAY for door opening and siren.
- External yellow light available for user to set.

## Specification

- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• Power Supply : DC 12V ±15%</li> <li>• Frequency : 125KHz or 13.56MHz .</li> <li>• Door closing time: 00-99 seconds.</li> <li>• Card capacity: 1000</li> <li>• Operation mode : Standalone</li> <li>• Keyboard: 3×4, 12 stainless steel buttons.</li> <li>• Dimensions: 107L × 80W × 18H (mm).</li> <li>• Weight : 200g (included wrapping).</li> </ul> | <ul style="list-style-type: none"> <li>• Power consumption: 130mA (standby); 150mA (operation)±5%</li> <li>• Fireproof polycarbonate material for outer casing .</li> <li>• Five door opening methods:                     <ol style="list-style-type: none"> <li>1. Password</li> <li>2. Proximity card</li> <li>3. Proximity card and password</li> <li>4. Password or proximity card</li> <li>5. Special system password</li> </ol> </li> <li>• Input point: 1.Exit push button 2.Anti-theft detection 3.Door sensing input</li> <li>• Output point: 1. Door open connector 2. Alarm output</li> </ul> |
|---|---|

## Waterproof

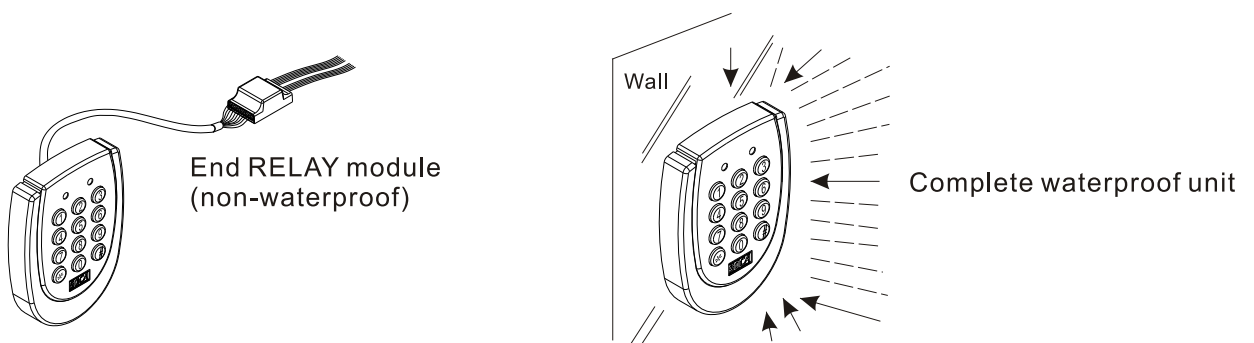

## Structure diagram

