



## Series Model

- SL-200 :With lock status indicator and door position detection output (NO/NC)
- SL-200S:Without indicator and door position detection output
- SL-200T:With delay and door open push button functions (stand-alone and do not need to connect with access control unit)


## Special features

- Holding force:600lbs(250Kg).
- Suitable for Exit door ,Out-swing door and In-swing door.
- Power Supply: DC12V or DC24V (adjustable)

- Fail-safe (power to lock) electric lock suitable for fire exit.
- Special surface enhancement process which is anti-rust for its durability.
- For use with any types of the access control unit with built-in surge absorber to prevent any interference to the reader.
- Special aluminum hardening, all materials used are fireproof.
- Monitor output with Hall Effect for its stability and high accuracy.


Specification				Dimensions	
	SL-200S	SL-200	SL-200T		
Delay Time	X	X	0,3,5,9 Sec.		
Open door contact	X	X	Photo coupler contact		
Lock status sensor	X	N.C. & N.O. Output (Reed switch) 0.25mA			
Indicator	X	Double-colored LED light			
Power Supply	DC 12V or DC24V ± 15%				
Operation current	450mA@12VDC mA ± 5% / 235mA@24VDC mA ± 5%				
Application	Exit door ,Out-swing door and In-swing door				
Holding forces	600lbs(250Kg)				
Demagnetizer design	Instant demagnetizer when power is off.				
Operation temperature	40℃ ± 5℃ (Room temperature 30℃ )				
Weight	2150g (included wrapping)				

Unit: mm

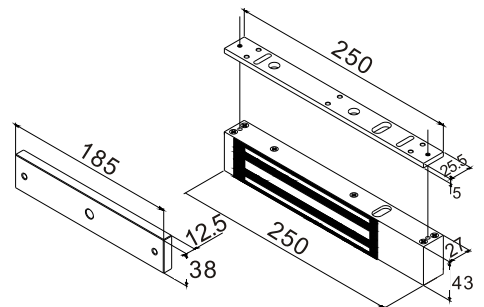

Unit: mm


## Related products

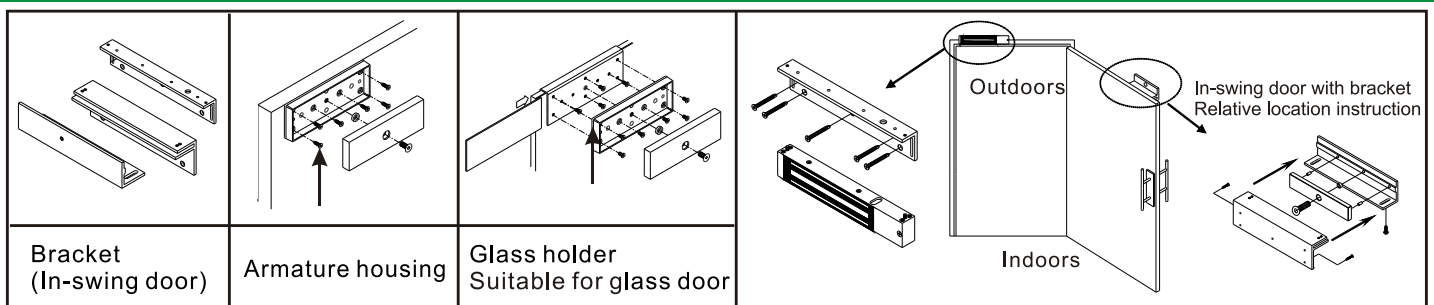

## Structure diagram

※Note: The lock unit has to be installed indoors.

【Out-swing door】



【In-swing door】 \*Bracket is needed

