

Series Model

- SL-150C : Standard model, without lock status indicator output.
- ✘ This unit does not come with any other series.

Special features


- Holding force:143lbs(65Kg).
- Fail-safe (power to lock) electric lock .

- Use with bracket for different installation to see fit.
- Power input DC12V, it is also to be used with current lower than DC12V.
- Strong holding force. DC3V is able to obtain 15kg holding force.
- Low power consumption with high efficiency, noise-free.

Specification

	SL-150C
Power Supply	DC 12V $\pm 15\%$
Operation current	150mA@12VDC $\pm 15\%$
Application	Mailbox 、drawer 、locker
Holding forces	170lbs(80Kg)/ DC 12V
Operation temperature	40°C $\pm 5^\circ\text{C}$ (Room temperature 30°C)
Operation environment	Temperature 0-80°C, Humidity 85%Rh max
Weight	635g (included wrapping)

Dimensions

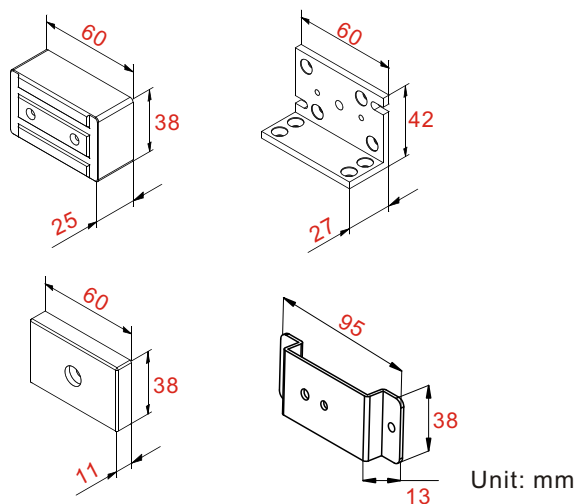

Structure diagram

5 installation methods available according to the environment.

