




SD-30



SD-50



SD-50A

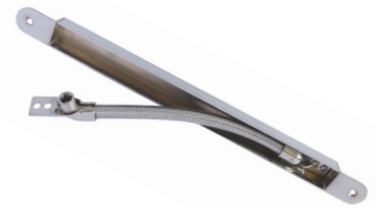

SDM-30/40/50

■ Wire conduit to protect exposed wires in order not to be damaged.








Specifications

Model	SD-30	SD-50	SD-50A	SDM-30	SDM-40	SDM-50
Connector Material	ABS	Zinc Alloy	Zinc Alloy	Embedded box and connector : Iron		
Conduit Material	Stainless steel	Galvanized iron	Stainless steel	Spring steel		
Inner diameter of the conduit	7mm	9.5mm	9.5mm	10.4mm	10.4mm	10.4mm
Outside diameter of the conduit	9mm	12.5mm	12.5mm	13.8mm	13.8mm	13.8mm
Length of the conduit	320mm	400mm	400mm	250mm	416mm	470mm
Total length	360mm	500mm	500mm	325mm	490mm	545mm
Weight	26g	222g	212g	283g	448g	503g

Dimensions

Unit: mm

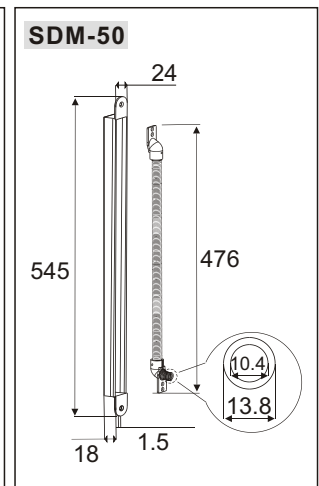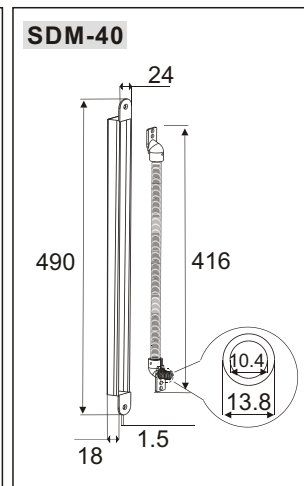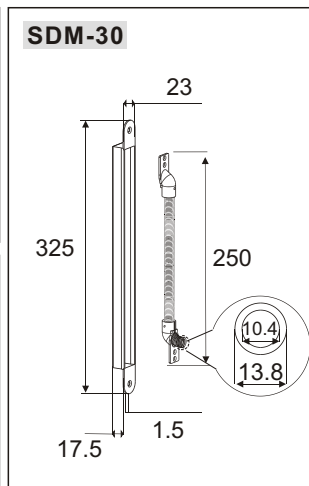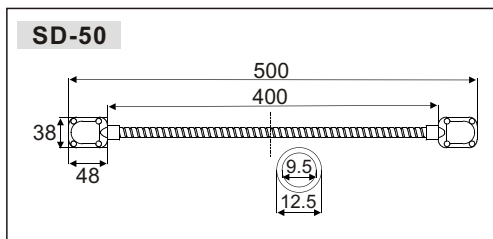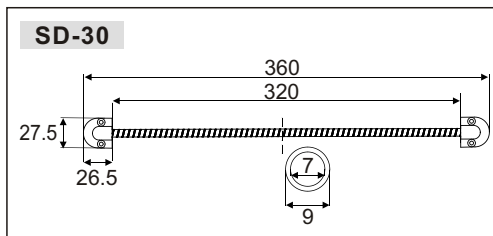

Structure diagram

